
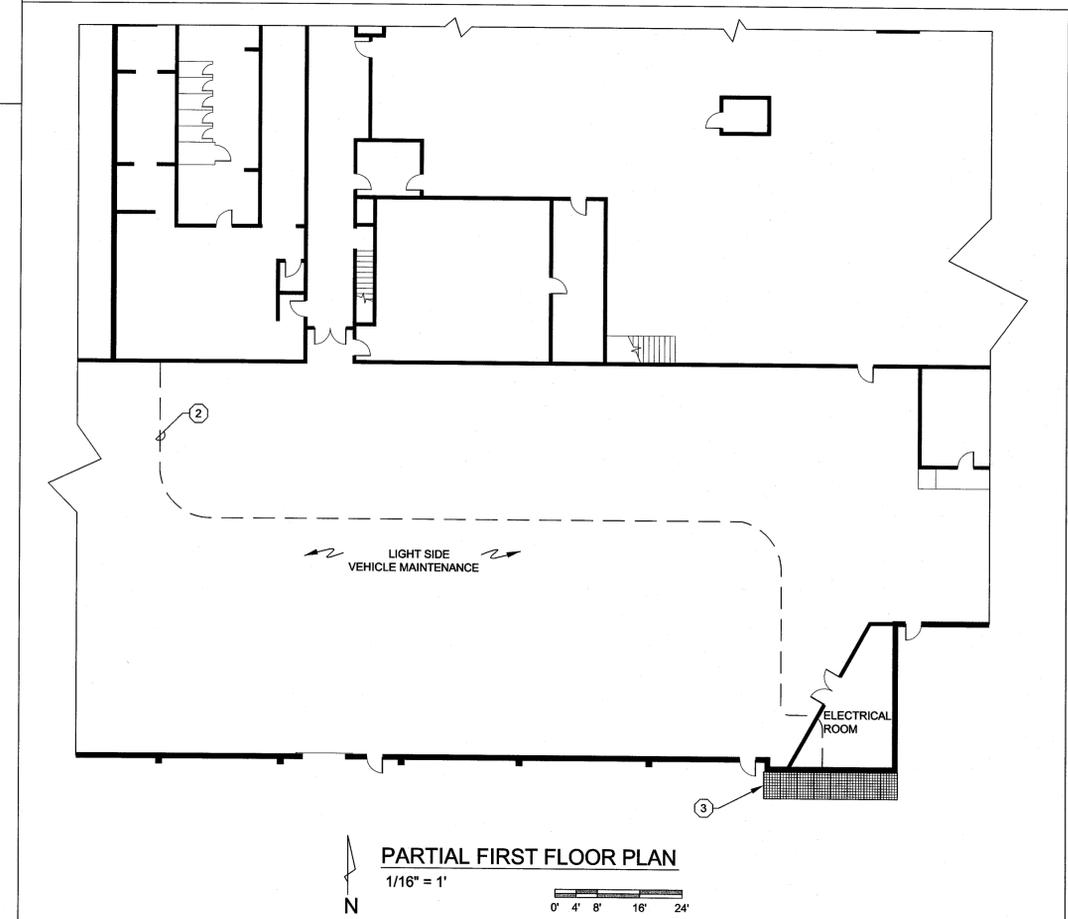


PLAN NOTES: (X)

- CONTRACTOR TO DETERMINE BEST LOCATION FOR WALL PENETRATION TO ROOF AND WALL PENETRATION TO FIRST FLOOR, PENETRATION TO ROOF SHALL BE SEALED INTERNALLY FOR AIR CONVECTION. PENETRATION TO ROOF SHALL BE MADE WATER TIGHT, MASONRY PENETRATIONS SHALL BE PATCHED AROUND CONDUITS.
- APPROXIMATE CONDUIT PATH TO CANOPY PV COLLECTORS IN VEHICLE MAINTENANCE. CONTRACTOR TO COORDINATE PATH WITH OWNER ON SITE AND COORDINATE INSTALLATION. ASSUME INSTALLATION MUST BE DONE DURING EVENING OR WEEKEND HOURS. THE WALL BEING PENETRATED INTO THE COMPRESSOR ROOM IS 2 HOUR RATED PROVIDE PENETRATION PER SPECIFICATION SECTION 26 05 34, CONDUIT.
- CANOPY PV COLLECTORS TO BE MOUNTED ON MASONRY WALL AT A HEIGHT AGREED UPON ON SITE TO BE ABOVE TREE - ASSUME TOP OF COLLECTOR AT 3' BELOW PARAPET TOP.

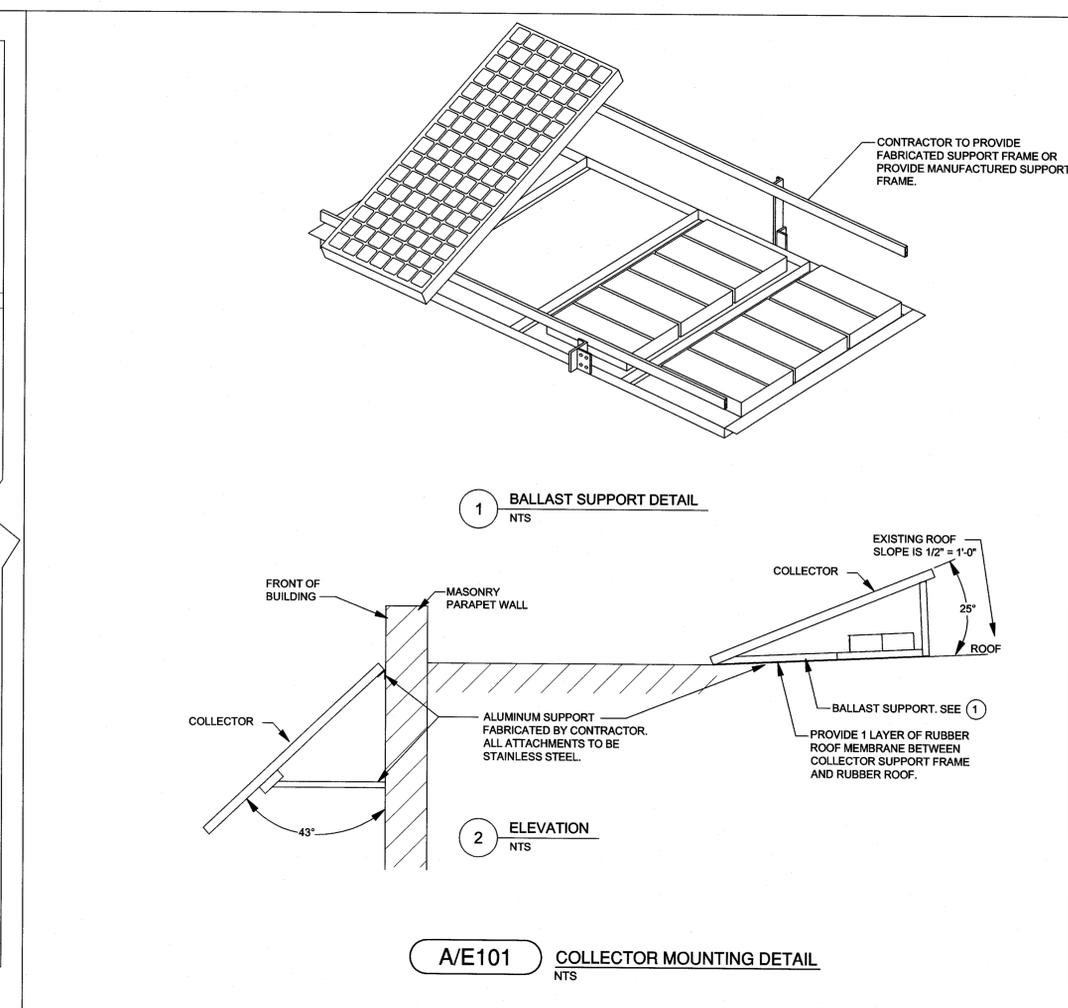

REVISIONS

#	DESCRIPTION	DATE

Drawn by: EJM
Checked by: FM
Date: 07-05-11

Sheet Title
PARTIAL FIRST & SECOND FLOOR PLAN

Sheet Number
E101