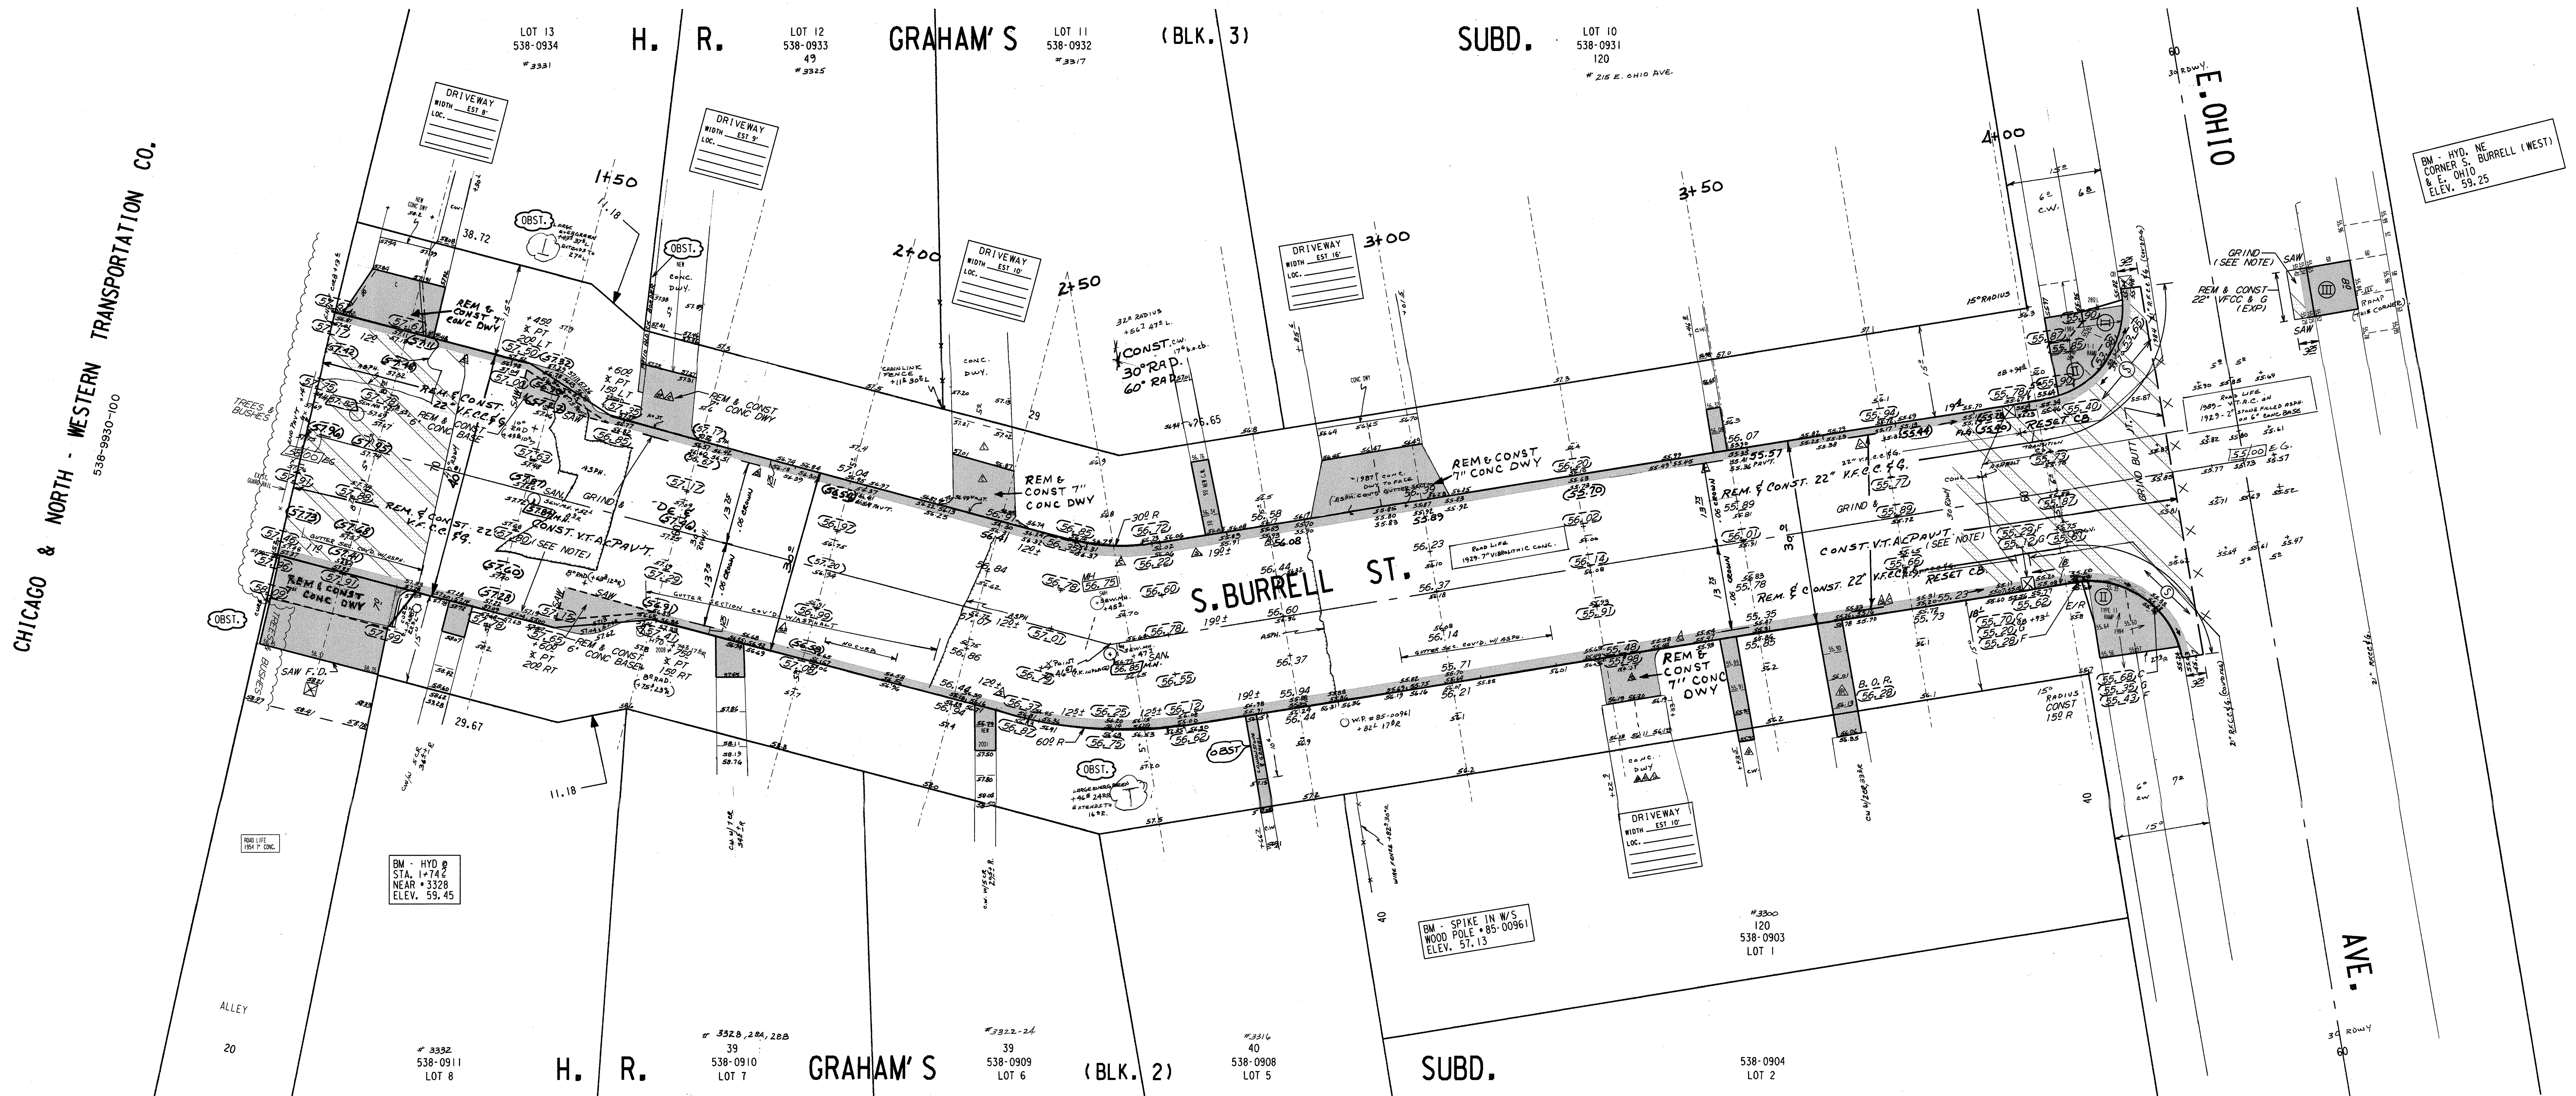

NOTES

- GRADE & SOD 3' BACK OF CURB, & 1.5 WIDTH OTHERWISE WHERE CONSTRUCTION FORMS DISTURB EXISTING LAWN.
- PITCH FLANGE 0.08' UNLESS OTHERWISE NOTED.
- REM. ALL ASPH. PATCHES WITHIN LIMITS OF CONSTRUCTION
- ANY TREES TO BE REMOVED AS PART OF THIS PROJECT WILL BE INDICATED IN THE CONTRACT SPECIAL PROVISIONS.
- CONST. CARRIAGE WALKS & DRIVEWAYS TO CITY OF MILWAUKEE SPECS.
- (I), (II), (III) DENOTES RAMP TYPE.
- PROJECT IS DESIGNED TO BE CONSTRUCTED IN TWO EQUAL PASSES WITH A .06' CROWN IN EACH PASS
- GRIND ENTIRE ROADWAY AS NECESSARY TO ACHIEVE .12' COVER AT FLANGES, .17' COVER AT BUTT JTS. AND .21' ELSEWHERE
- INTERNAL MH SEALS ARE REQUIRED IN ALL MANHOLES MARKED SAN. (SANITARY).

BM - HYD. NE CORNER S. AUSTIN & E. OHIO ELEV. 55.93

ESTIMATE / CERTIFICATE QUANTITIES

	DESCRIPTION	UNIT	ASSESS.	X-ING			PLAN TOT.	PROJ. TOT.
/	MOBILIZATION	L.S.						
/	FINISHING ROADWAY	L.S.						
	TRAFFIC CONTROL SIGNS	DAYS						
	BARR'S T-I &/OR NON-MET. DRUMS	DAYS						
	BARRICADES TYPE III	DAYS						
	CUTTING	C.Y.						
	ROADWAY CUTTING	C.Y.						
	FILLING	C.Y.						
	ROADWAY FILLING	C.Y.						
	PAVEMENT REMOVAL	S.Y.						
/	BITUMINOUS SURFACE REMOVAL	S.Y.						
/	CURB &/OR CURB & GUTTER REMOVAL	L.F.						
/	CONC. WALK &/OR DRIVEWAY REMOVAL	S.F.						
/	SAWING (FULL DEPTH)	L.F.						
/	SAWING	L.F.						
	TREES CLEARING	I.D.						
	TREES GRUBBING	I.D.						
/	22" V.F. CONCRETE CURB & GUTTER	L.F.						
	V.T. CONC. WALK &/OR DRIVEWAY	C.Y.						
/	5" CONCRETE WALK	S.F.						
/	7" CONCRETE DRIVEWAY	S.F.						
	CONCRETE PAVEMENT	S.Y.						
	7" CONCRETE ALLEY PAVEMENT	S.Y.						
	V.T. CONCRETE BASE	C.Y.						
/	6" CONCRETE BASE	S.Y.						
/	TACK COAT	GAL.						
/	BASE PREP. FOR ASPHALT SURFACE	L.S.						
/	V.T. ASPH. CONC. PAV'T. (1/4" MAX.)	S.Y.						
	CRUSHED STONE BASE							
	CRUSHED GRAVEL BASE							
/	GRAVEL FILLING	TON						
/	SODDING	S.Y.						
/	TOPSOIL	C.Y.						
	PAVEMENT GRINDING (ASPHALT)	S.Y.						
/	PAVEMENT GRINDING (CONCRETE)	S.Y.						
	SEALING PAV'T JOINTS & CRACKS	S.Y.						
	MANHOLE RINGS	EACH						
/	SEWER FRAME ADJUSTMENT	V.F.						
	MANHOLE SEAL (CITY FURNISHED)	EACH						
/	EROSION CONTROL (TYPE M)	EACH						
	EROSION CONTROL (TYPE P)	EACH						

CONDITION OF CONCRETE
(B) BROKEN
(C) CRACKED
(H) HEAVED
(P) PATCHED
(S) SETTLED
(SP) SPALLED

DEPARTMENT OF PUBLIC WORKS
INFRASTRUCTURE SERVICES DIVISION
FIELD OPERATIONS
FIELD & DESIGN ENGINEERING
MILWAUKEE, WISCONSIN

FILE NO. 1306

PLAN OF: S. BURRELL ST. 3300 S. 200 E.

PT. 275' S. OF E. OHIO AVE. TO E. OHIO AVE.

THIS SECTION:

DRAWN BY	R. CHUKMAN	DATE: 2-22-93	PROJECT NO. ST211060141		SHEET 1 OF 1
DESCRIPTIONS BY	R. CHUKMAN	DATE: 2-22-93			
LEVELS BY	S. CULL	DATE: 3-24-93	SCALE	1/4 SEC.	ALD. DIST.
LEVELS TRANSF. BY	P. VELLA	DATE: 3-26-93	1" = 10'	538	14
DESIGNED BY	K. POENISCH	DATE: 9-14-93	OBSTRUCTIONS - AS SHOWN		
GRADES TRANSF. BY	P. VELLA	DATE: 9-17-93	REVISED: 9-1-05 FIELD/DESIGN UPDATE		
CHECKED BY	D. Ulutusk	DATE: 2/5/14	REVISED: 5-2-07 DESIGN UPDATE K. CHOI		
APPROVED BY	[signature]	DATE: 2/6/14	REVISED: 5-7-09 DESIGN UPDATE K. CHOI		
FILE: V:\PWELIB\PAVING\27179_NO WALK.FIN			REVISED: 12-12-12 REVISED MANHARDT		
PLOT DATE: 04-FEB-2014					

STORM DRAINAGE UNITS		
C.B.W. - 0	RESET - 2	ABANDON - 0
PROJECT IN SEPARATED AREA		

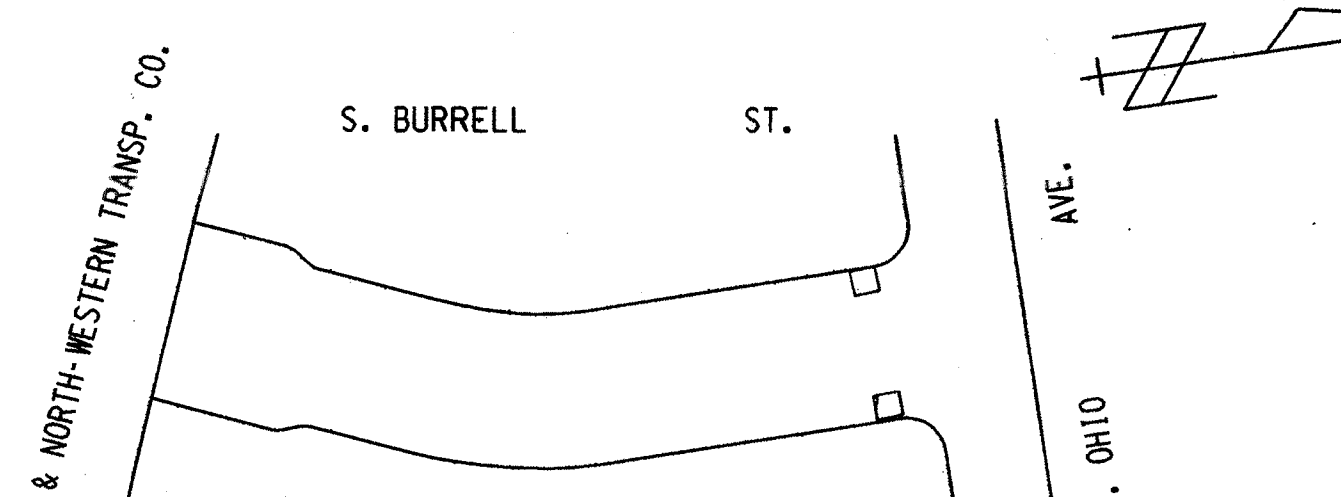

EROSION CONTROL AND C.B. REQUISITION PLAN

TYPE M	☒ - CBW	☐ - RESET	X - ABANDON
2	0	2	0

TO \ DATE	9-30-93	12-3-93	1-13-06	2/6/14	9/2/14	3/10/15
ESTIMATING	4		1	1		
HOLLOW WALKS			1	1		
PUBL. HEAR.		1	1	1		
ST. CONST.		1	1	1	6	6
SEWER		1	1	1		
WATER		1	1	1		
B.T.E.& E.S.		1	2			
HSE. SERV.		1	1			
MEASURING					1	1
RM 506					6	6
DIST. FILE		2	2	2		
FORESTRY		1	1	1		
ELEC. CO.		1	1			
GAS CO.		1	1	1		
TRANS. CO.						
Bldg Sewer				1		
S.P.		1				
UTILITY COORD.			1	1		
SEWER SERV			3			
UG COND			1	1		
WATER DIST			1	1		
Street Light				1		
Traffic Eng.				1		
WEPCO S/S				1		
DRAW. SIZE	18" X 79"					

S. BURRELL ST. - PT. 275' S. OF E. OHIO AVE. TO E. OHIO AVE. 18" X 79" ST211060141 27179 # (1 OF 1)